


C19

LOCKABLE OUTLET

Technical Information

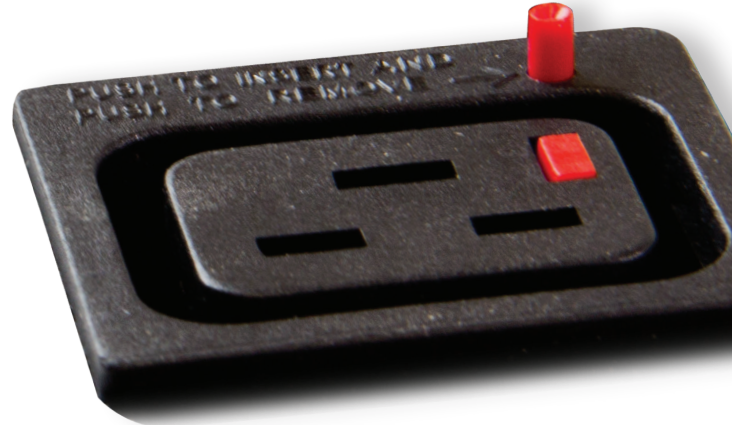

General Information

- Snap-in mounting from front
- Solder terminal or quick connect from single terminal
- Protection class 1
- Integral plug retention feature

Technical Data

Rating: 16A/250VAC

Insulation Resistance:
10MΩ (500VDC, 1 Min.)

Dielectric Strength:
2KV (50Hz 1 Min) to accessible surfaces

Materials Socket:
Black Thermoplastic UL94V-0

Approvals

16 A/250VAC: ENEC 05, KEMA KEUR

20 A/250VAC: UL

Patent

UK Number: 2463468B

EU Number: EP2321879A

HK Number: HK1141901

Chinese Patent Application No:
CN 102150330 A

Other worldwide patents pending

Product

- Black & White IEC320 Snap in 1mm or 1.5mm Panel Thickness
- Quick Connector/Solder 6.3 x 0.8mm

Standards

IEC/EN 60320-2-2/FUL498

CSA C22.2 No 182.3-M1987

Scolmore
GROUP

visit: www.ieclock.com

call: +44 (0)1827 63454

email: oemsales@scolmore.com

ConMec

Tlf; 21 08 80 00

post@conmec.no

www.conmec.no